

# ERT SERIES

ELECTRIC POWERED ROUGH TERRAIN SCISSOR LIFT

**AERIAL  
TITANS**

866-874-0584  
WWW.AERIALTITANS.COM

**JLG**®

## Performance

### Platform Height—Elevated

|         |       |        |
|---------|-------|--------|
| ERT2669 | 26'2" | 8 m    |
| ERT3369 | 32'8" | 10 m   |
| ERT4069 | 40'3" | 12.3 m |
| ERT4769 | 47'   | 14.3 m |

### Platform Height — Lowered

|         |       |       |
|---------|-------|-------|
| ERT2669 | 4'3"  | 1.3 m |
| ERT3369 | 4'9"  | 1.5 m |
| ERT4069 | 4'10" | 1.5 m |
| ERT4769 | 5'4"  | 1.6 m |

### Platform Capacity (Single Extension)

|         |          |           |
|---------|----------|-----------|
| ERT2669 | 1,500 lb | 680 kg    |
| ERT3369 | 1,000 lb | 453.59 kg |
| ERT4069 | 800 lb   | 363 kg    |
| ERT4769 | 800 lb   | 363 kg    |

### — Capacity on Deck Extension

|  |        |        |
|--|--------|--------|
|  | 300 lb | 136 kg |
|--|--------|--------|

### No. Occupants (Indoor/Outdoor)

|         |     |
|---------|-----|
| ERT2669 | 4/4 |
| ERT3369 | 4/2 |
| ERT4069 | 3/2 |
| ERT4769 | 3/2 |

### Lift/Lower Time

|         |               |
|---------|---------------|
| ERT2669 | 36/28 seconds |
| ERT3369 | 42/33 seconds |
| ERT4069 | 69/46 seconds |
| ERT4769 | 81/55 seconds |

### Maximum Drive Height

Full Height

### Weight (single extension w/out leveling jacks)\*

|         |           |          |
|---------|-----------|----------|
| ERT2669 | 8,627 lb  | 3,913 kg |
| ERT3369 | 9,427 lb  | 4,276 kg |
| ERT4069 | 10,560 lb | 4,790 kg |
| ERT4769 | 13,636 lb | 6,194 kg |

### Drive Speed—Lowered

|  |         |          |
|--|---------|----------|
|  | 3.5 mph | 5.6 km/h |
|--|---------|----------|

### Drive Speed—Elevated

|  |         |          |
|--|---------|----------|
|  | 0.5 mph | 0.8 km/h |
|--|---------|----------|

### Max Tilt Rating (side-to-side)

|  |             |
|--|-------------|
|  | 2.5 Degrees |
|--|-------------|

### Max Tilt Rating (fore & aft)

|  |           |
|--|-----------|
|  | 3 Degrees |
|--|-----------|

### Gradeability

|         |     |
|---------|-----|
| ERT2669 | 40% |
| ERT3369 | 40% |
| ERT4069 | 35% |
| ERT4769 | 30% |

### Turning Radius (Inside)

|  |     |     |
|--|-----|-----|
|  | 83" | 2 m |
|--|-----|-----|

### Turning Radius (Outside)

|  |      |     |
|--|------|-----|
|  | 175" | 4 m |
|--|------|-----|

\* Certain options or country standards will increase weight.

## Standard Specifications

### Power Source

|             |                   |
|-------------|-------------------|
| Drive (2WD) | AC Electric Drive |
|-------------|-------------------|

### Tires

|                         |                     |
|-------------------------|---------------------|
| Tire size (non-marking) | 26 x 12 Foam Filled |
|-------------------------|---------------------|

### Hydraulic System

|                     |                |
|---------------------|----------------|
| Hydraulic Reservoir | 13.2 gal (50L) |
|---------------------|----------------|



## Standard Features

- 42in Roll-out Deck Extension
- Moveable, Removable Platform Console Box
- Nickel Plated Pins, Yellow Zinc-Chromate Plated Fasteners
- Pin-Less Fold Down Rail System
- Platform Control Box with LCD Display, USB Charger and Phone Holster
- Self-closing Gate
- Full Time Traction Control
- Lubrication-Free Scissor Arm Bushings
- Manual Descent Pull Cable<sup>1</sup>
- Oscillating Front Axle
- Scissor Maintenance Prop
- Tie Down Lugs
- 26 x 12 Foam Filled Non-Marking Tires
- 110V-AC Receptacle In Platform
- 23 Amp Automatic, SCR Battery Charger
- 8 x 6V, 225 Amp-Hour Batteries (ERT2669, ERT3369)
- 8 x 6V, 310 Amp-Hour Batteries (ERT4069)
- 8 x 6V, 375 Amp-Hour Batteries (ERT4769)
- All Motion Alarm
- Descent Alarm
- Horn
- Hourmeter
- 2WD AC Drive System
- Proportional Lift and Drive
- LCD Display with LiftSense System
- Pin-based Load Sensing System
- Telematics-Ready Harness

## Accessories & Options

- Hydraulic Leveling Jacks (Auto Level)
- 26 x 12 Foam Filled Lug Tread Tires
- 8 x 6V, 310 Amp-Hour Batteries (ERT2669, ERT3369)
- 8 x 6V, 375 Amp-Hour Batteries (ERT4069)
- Flashing Amber Beacon - LED
- Dual Flashing Amber Beacons - LED
- White Noise Backup Alarm
- JLG CleanGuard
- Special Hydraulic Fluids
- Special Paint
- ClearSky™
- Operator Access Control
- Generator Set (Kubota Stage V OC60-E4 6hp (4.5kW))
- Heavy Duty Pipe Racks

1. ERT4769 Includes a Push-Button Manual Descent System

<< go back

**AERIAL  
TITANS**

866-874-0584  
WWW.AERIALTITANS.COM


**JLG**®

# ERT SERIES

ELECTRIC POWERED ROUGH TERRAIN SCISSOR LIFT

## Dimensions

All dimensions are approximate.

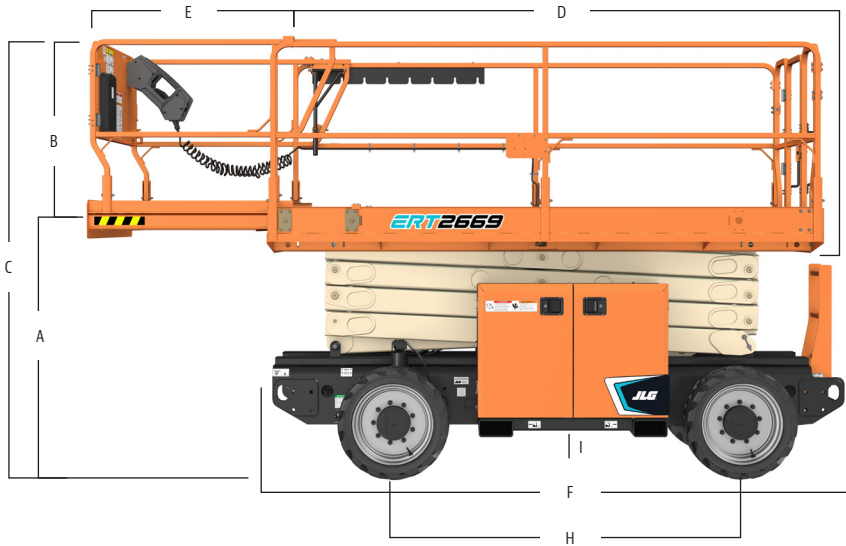

### Platform Height — Elevated

|         |       |        |
|---------|-------|--------|
| ERT2669 | 26'2" | 7.98 m |
| ERT3369 | 32'8" | 9.96 m |
| ERT4069 | 40'3" | 14.1 m |
| ERT4769 | 47'   | 14.3 m |

### A. Platform Height - Lowered

|         |       |        |
|---------|-------|--------|
| ERT2669 | 4'3"  | 1.3 m  |
| ERT3369 | 4'9"  | 1.46 m |
| ERT4069 | 4'10" | 1.46 m |
| ERT4769 | 5'4"  | 1.62 m |

### B. Platform Railing Height\*

|         |       |        |
|---------|-------|--------|
| ERT4769 | 44.7" | 1.14 m |
|---------|-------|--------|

### C. Overall Height

|         |        |        |
|---------|--------|--------|
| ERT2669 | 96.7"  | 2.46 m |
| ERT3369 | 102.9" | 2.61 m |
| ERT4069 | 103"   | 2.62 m |
| ERT4769 | 109.1" | 2.77 m |

### D. Platform Dimensions

|         |              |             |
|---------|--------------|-------------|
| ERT4769 | 130.5" x 63" | 3.3 x 1.6 m |
|---------|--------------|-------------|

### E. Platform Extension

|         |     |        |
|---------|-----|--------|
| ERT4769 | 42" | 1.07 m |
|---------|-----|--------|

### F. Overall Machine Length

|         |      |        |
|---------|------|--------|
| ERT4769 | 139" | 3.53 m |
|---------|------|--------|

### G. Overall Machine Width

|         |       |        |
|---------|-------|--------|
| ERT4769 | 69.3" | 1.76 m |
|---------|-------|--------|

### H. Wheelbase

|         |       |        |
|---------|-------|--------|
| ERT4769 | 81.3" | 2.07 m |
|---------|-------|--------|

### I. Ground Clearance

|         |       |         |
|---------|-------|---------|
| ERT4769 | 10.1" | 25.7 cm |
|---------|-------|---------|

\*Fold Down Rails

**AERIAL  
TITANS** 866-874-0584  
WWW.AERIALTITANS.COM

Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification.

<< go back

**JLG**®

## The JLG "1 & 5" Warranty

We provide coverage for one (1) full year, and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable ANSI and CSA requirements based on machine configuration as originally manufactured for intended applications. Please reference the serial number plate on the machine for additional information.

Part No.: 3131510  
R0920  
Printed in USA

**JLG Industries, Inc.**  
1 JLG Drive  
McConnellsburg, PA 17233-9533  
Telephone 717-485-5161  
Toll-free in US 877-JLG-LIFT  
Fax 717-485-6417  
[www.jlg.com](http://www.jlg.com)

**An Oshkosh Corporation Company**