




Self-Propelled Scissor Lifts

GS™ -3384 RT

Specifications

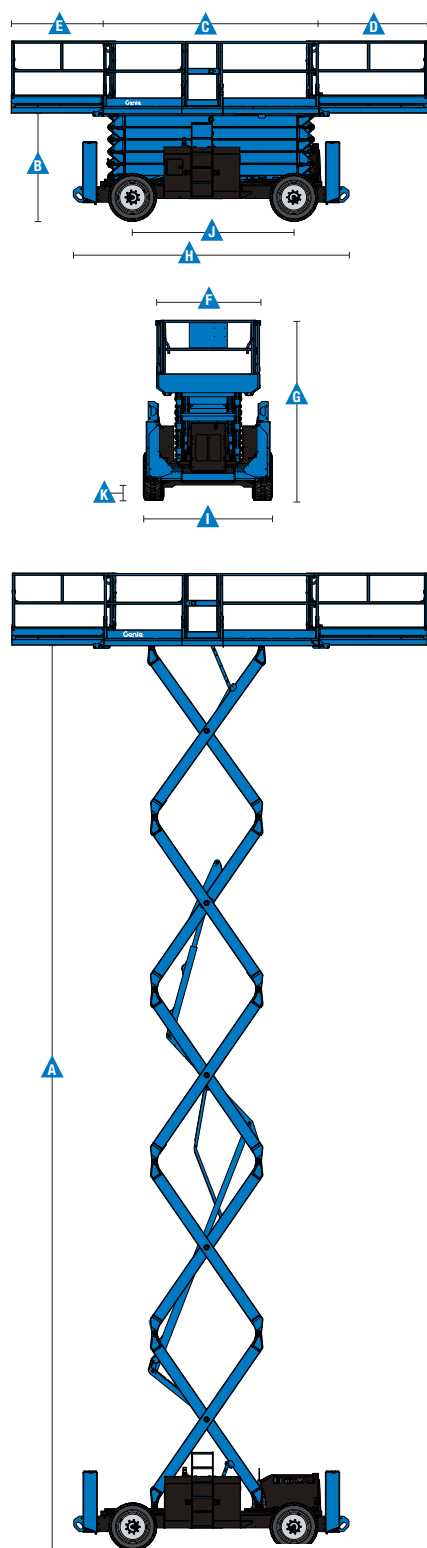

Model	GS-3384 RT	
Measurements	US	Metric
Working height maximum ¹	39 ft	12.06 m
▲ Platform height maximum	33 ft	10.06 m
▲ Platform height - stowed ²	5 ft 1 in	1.55 m
▲ Platform length:		
outside, extended - single deck	12 ft 11.25 in	3.94 m
outside, extended - dual deck	17 ft 6.25 in	5.34 m
outside, extended - dual deck	21 ft 6.5 in	6.57 m
▲ Slide-out platform extension deck - front	5 ft	1.52 m
▲ Slide-out platform extension deck - rear	4 ft	1.22 m
▲ Platform width - outside	6 ft	1.83 m
▲ Height - stowed: folding rails	8 ft 9.5 in	2.68 m
rails lowered	6 ft 6.75 in	2.0 m
▲ Length - stowed: single deck	12 ft 11.25 in	3.94 m
dual deck	13 ft 0.5 in	3.98 m
with outriggers	16 ft	4.88 m
▲ Width: standard tires	7 ft	2.13 m
high flotation tires	7 ft 11 in	2.41 m
▲ Wheelbase	9 ft 4 in	2.84 m
▲ Ground clearance - center	13 in	.33 m

Productivity

Maximum platform occupancy (in/out)	7/7	
Lift capacity	2,500 lbs	1,134 kg
Lift capacity - extension deck	500 lbs	227 kg
Drive height	full height	
Drive speed - stowed	4.0 mph	6.4 km/h
Drive speed - raised	0.7 mph	1.1 km/h
Gradeability - stowed ³	50%	
Tilt sensor activation - front to back	3°	
- side to side	2°	
Maximum outrigger leveling: front to back	7°	
side to side	12°	
Turning radius - inside	10 ft 1.5 in	3.09 m
Turning radius - outside	19 ft 6 in	5.94 m
Raise/lower speed	45/29 sec	
Controls	proportional	
Drive	four wheel	
Tires - foam-filled rough terrain	10 x 31 in	25 x 79 cm

Power

Power source	Ford MSG-425 4 cylinder gas/LPG 75 hp (56 kW) Deutz D2011L03i 3 cylinder diesel 49 hp (36 kW) air cooled	
Auxiliary Power unit	12 V DC	
Fuel tank capacity	30 gal	113.6 L
Hydraulic system capacity	30 gal	113.6 L

Weight⁴ / Floor Loading⁵

Weight - ANSI/CSA	11,825 lbs	5,364 kg
- with outriggers	13,500 lbs	6,124 kg
Tire load, maximum	4,689 lb	2,127 kg
Tire contact pressure	129 psi	886 kPa
Occupied floor pressure	177 psf	8.49 kPa

Standards Compliance

ANSI A92.20, CSA B354.6, CE EN280, AS 1418.10

¹ The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

² Based on RT tires; deduct 2 in (5.8 cm) for turf and non-marking tires.

³ Gradeability applies to driving on slopes. Gradeability may vary depending on the weight of options installed on machine.

See operator's manual for details regarding slope ratings.

⁴ Weight varies depending on options and country standards.

⁵ Note: Floor loading information is approximate and does not incorporate different option configurations. It should be used only with adequate safety factors.



Self-Propelled Scissor Lifts

GS™ -3384 RT

Features

Standard Features

Measurements

- 39 ft (12.06 m) working height
- Up to 2,500 lbs (1,134 kg) lift capacity

Productivity

- 156.5 x 72 in (3.98 x 1.83 m) steel frame platform
- 60 in (1.52 m) extension deck
- Replaceable aluminum diamond plate deck
- Drive at full height
- Folding rails
- Proportional lift and drive
- Platform load sense system
- Platform control guard
- Onboard diagnostic system
- AC power to platform
- Full height swing gate
- Two self-closing gates
- 4WD
- Positive traction control
- Four-wheel braking
- Slide-out engine tray
- Foam-filled rough terrain tires
- Tilt level sensor with audible alarm
- Dual flashing LED beacons
- Descent alarm
- Horn
- Hour meter
- Motion alarm
- Lift Connect™ Telematics

Power

- 48 hp (36 kW) Deutz D2.9L4 diesel, Tier 4f


Options & Accessories

Productivity Options

- Dual slide-out platform extension deck package 5 ft (1.52 m) front and 4 ft (1.22 m) rear
- Automatic leveling hydraulic outriggers
- Air line to platform
- Foam filled non-marking rough terrain tires
- High flotation foam-filled tires
- Biodegradable hydraulic oil
- Platform control guard

Power Options

- 75 hp (56 kW) Ford MSG 425 gas/LPG
- AC, 2000 Watt generator (120 V / 60 Hz), (includes hydraulic oil cooler)
- Cold weather package
- Hydraulic oil cooler
- Diesel catalytic scrubber muffler
- LPG steel tank only, 33.5 lb capacity

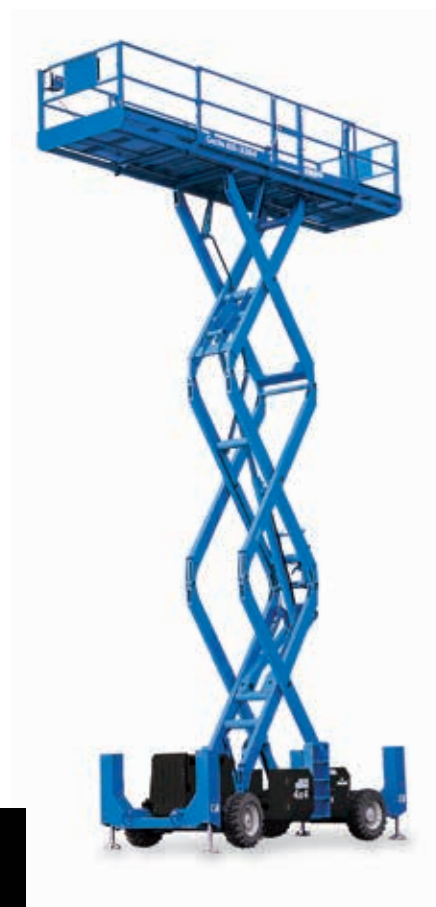

<< go back

AERIAL TITANS
866-874-0584
WWW.AERIALTITANS.COM

Genie United States

6464 185th Ave. NE
 Redmond, WA 98052
 Telephone +1 (425) 881-1800
 Toll Free in USA/Canada +1 (800)-536-1800
 Fax +1 (425) 883-3475

Distributed By:

Effective Date: November, 2019. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Terex, Genie and AWP are registered trademarks of Terex Corporation or its subsidiaries. © 2019 Terex Corporation.