# RT3394

SCISSOR LIFT

# **AERIAL TITANS**

866-874-0584 WWW.AERIALTITANS.COM

## << go back



#### **KEY SPECS**

Platform Height 33-ft / 10.06-m

Platform Capacity 2,250-lb / 1,020-kg

### **Machine Width**

7-ft 9-in / 2.4-m

#### Stowed Drive Speed

3.5 mph / 4.8 km/h

#### **KEY FEATURES**

- Our electric powered rough terrain models offer drive capability at full height, limiting unnecessary trips up and down for working professionals.
- This machine utilizes higher part commonality and a maintenance-free 2WD AC drive system for simplified service across the rough terrain family.
- Delivers the latest technology, featuring an LCD platform control box with LiftSense technology and USB charging for next-level, real-time productivity and service communication to the operator.
- This model is the tallest machine in its class, providing access to five-story heights

#### ACCESSORIES & OPTIONS

- 1/2-in Airline to Platform
- 43.5-lb (19.7-kg) Propane
- Cold Weather Start Kit
- Dual Extension Deck
- Flashing Amber Beacon
- Leveling Jacks
- Pipe Rack Accessory
- Platform Worklights
- SkyPower<sup>®</sup>
- SkyPower with SkyWelder
- Workstation

#### STANDARD SPECIFICATIONS

#### Performance

Platform Height (Elevated) 3:
Platform Capacity 2,
Capacity on Platform Extension 5:
Number of Occupants 6
Lift / Lower Time 3:
Maximum Drive Height Fi
Weight w/One Extension\* 11
Ground Bearing Pressure 7:
Drive Speed 3.
Gradeability 4:
Max Tilt Rating (Side-to-Side) 3:

Max Tilt Rating (Fore and Aft)
Turning Radius (Inside)
Turning Radius (Outside)
"Certain options or country standards increase weight

33-ft / 10.06-m 2,250-lb / 1,020-kg 500-lb / 227-kg 6

35/32 seconds Fully Elevated 11,820-lb / 5,372-kg 73 psi / 5.1 kg/cm² 3.5 mph / 4.8 km/h 45% 3 Degrees 5 Degrees

8-ft 10.5-in / 2.7-m 19-ft 5.5-in / 5.9-m

#### Engine

 Dual Fuel – Kubota WG972
 31 hp / 23.2 kW

 Diesel Fuel – Kubota D1305
 24.8 hp / 18.5 kW

 Fuel Tank Capacity
 22 gal / 83.3 L

 Tires

IIres

Standard 12 x 16.5-in Foam-filled

Brakes

Rear Wheel Spring Applied

**Hydraulic System** 

Capacity 32 gal / 121.4 L

#### STANDARD FEATURES

- 110V-AC Receptacle in Platform
- 4-ft (1.22-m) Manual Deck Extension
- 4-Wheel Drive
- 70.5 x 149.8-in (1.8 x 3.8-m), All Steel Platform with Aluminum Deck
- Adjustable, Removable Platform Control Station
- All Motion Alarm
- Automatic Transmission
- Fold-Down Handrails
- Horn
- Oscillating Axle
- Proportional Drive/Lift Up/ Lift Down
- Three-speed Drive Select
- Tilt Light and Alarm



866-874-0584 www.aerialtitans.com

# RT3394


SCISSOR LIFT


866-874-0584
WWW.AERIALTITANS.COM

## << go back

#### **DIMENSIONS**

All dimensions are approximate



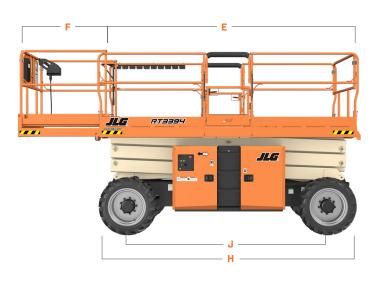

- A. Platform Height (Lowered)
- B. Platform Railing Height
- C. Machine Height
- Platform Width
- E. Platform Length
- 5-ft 3.57-in / 1.6-m 43.5-in / 1.1-m
- 9-ft 1-in / 2.77-m 70.5-in / 1.8-m
- 140.0 :- / 2.0
- 149.8-in / 3.8-m
- F. Platform Extension
- G. Machine Width
- H. Machine Length
- I. Wheelbase
- J. Ground Clearance
- 4-ft / 1.2-m
- 7-ft 9-in / 2.4-m 16-ft / 4.9-m
- 10-11 / 4.9-111
- 9-ft 9-in / 3.0-m
- 13.6-in / 34.5-cm

866-874-0584
WWW.AERIALTITANS.COM



We provide coverage for one (1) full year, and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior note final from the specification. This machine meets or exceeds applicable ANSI and CSA requirements based on machine configuration as originally manufactured for intended applications. Please reference the serial number plate on the machine for additional information.



JLG INDUSTRIES, INC.
Toll-free US 877-JLG-LIFT

**An Oshkosh Corporation Company**