## RT4394 **TERRAIN SERIES**



## << go back



### **KEY SPECS**

**Platform Height** 43-ft / 13.11-m

**Platform Capacity** 1,500-lb / 680-kg

#### **Machine Width** 7-ft 9-in / 2.4-m

SCISSOR LIFT

**Stowed Drive Speed** 3.5 mph / 5.6 km/h

#### **KEY FEATURES**

- Our electric powered rough terrain models offer drive capability at full height, limiting unnecessary trips up and down for working professionals.
- This machine utilizes higher part commonality and a maintenance-free 2WD AC drive system for simplified service across the rough terrain family.
- Delivers the latest technology, featuring an LCD platform control box with LiftSense technology and USB charging for next-level, real-time productivity and service communication to the operator.
- This model is the tallest machine in its class, providing access to five-story heights.

## ACCESSORIES & OPTIONS

- 1/2-in Airline to Platform
- 43.5-lb (19.7-kg) Propane Tank
- Cold Weather Start Kit
- Dual Extension Deck Flashing Amber Beacon
- Leveling Jacks
- Pipe Rack Accessory
- Platform Worklights
- SkyPower<sup>®</sup> SkyPower with SkyWelder
- Workstation



866-874-0584 WWW.AERIALTITANS.COM

## STANDARD SPECIFICATIONS

#### Performance

Platform Height (Elevated) 43-ft / 1311-m **Platform Capacity** Capacity on Platform Extension Number of Occupants 6 Lift / Lower Time Maximum Drive Height Weight w/One Extension\* Ground Bearing Pressure Drive Speed Gradeability 45% Max Tilt Rating (Side-to-Side) 3 Degrees Max Tilt Rating (Fore and Aft) 5 Degrees Turning Radius (Inside) Turning Radius (Outside) \*Certain options or country standards increase weight

1,500-lb / 680-kg 500-lb / 227-kg 45/42 seconds Fully Elevated 14,300-lb / 6,486-kg 83 psi / 5.8 kg/cm<sup>2</sup> 3.5 mph / 5.6 km/h 8-ft 10.5-in / 2.7-m 19-ft 5.5-in / 5.9-m

#### Engine

-		
Dual Fuel – Kubota W6972	31 hp / 23 kW	
Diesel Fuel – Kubota D1305	24.8 hp / 18.5 kW	
Fuel Tank Capacity	22 gal / 83.3 L	
Tires		
Standard	12 x 16.5-in Foam-filled	
Brakes		
Rear Wheel	Spring Applied	
Hydraulic System		
Capacity	32 gal / 121.4 L	

## STANDARD FEATURES

 110V-AC Receptacle in Platform 4-ft (1.22-m) Manual Deck

70.5 x 149.8-in (1.8 x 3.8-m),

All Steel Platform with

Extension

4-Wheel Drive


Aluminum Deck

- Adjustable, Removable Platform Control Station All Motion Alarm
- Automatic Transmission
- Fold-Down Handrails
- Horn
- Oscillating Axle
- Proportional Drive/Lift Up/ Lift Down
- Three-speed Drive Select
- Tilt Light and Alarm



# << go back

All dimensions are approximate

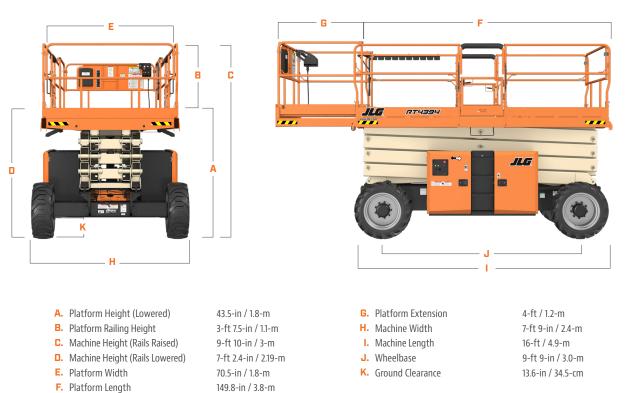





## 866-874-0584 www.aerialtitans.com



We provide coverage for one (1) full year, and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable ANSI and CSA requirements based on machine configuration as originally manufactured for intended applications. Please reference the serial number plate on the machine for additional information.



JLG INDUSTRIES, INC. Toll-free US 877-JLG-LIFT JLG.com

An Oshkosh Corporation Company

866-874-0584

WWW.AERIALTITANS.COM